

ADDENDUM NO. 02
Dated March 02, 2026

1. GENERAL

This document includes requirements that clarify or supersede portions of the contract requirements for the project. This Addendum is a Contract Document.

2. SUMMARY

The following changes, additions, and deletions shall be made to the following document(s) as noted in **RED**; all other conditions shall remain the same.

Changes to Document 00 41 13 Bid Form and Proposal

1. Replace Document 00 41 13 Bid Form and Proposal in its entirety.

Changes to Document 01 22 00 Alternates and Unit Pricing

1. Replace Document 01 22 00 Alternates and Unit Pricing in its entirety.

Changes to Drawings

1. Replace Sheet C 4.1 in its entirety.
2. Replace Sheet C 5.1 in its entirety.

Changes to Specifications

1. Replace Document 32 31 19 Decorative Metal Fencing in its entirety.

Q&A:

1. Question: Can you confirm that the post footing for the fence panels will not need rebar cages.
Answer: Typical fence post footings do not require steel as indicated in the Post Description Chart, Detail 1, Sheet C5.0.
2. Question: Can you confirm that only some of the gate footing will need rebar cages.
Answer: Only gates with a 12'-0" clear width or wider require steel reinforcement as indicated in the Post Description Chart, Detail 1, Sheet C5.0.
3. Question: Merchants Metals, one of the listed manufacturers for the Decorative Metal fencing, has stated, "we do not manufacture panels with 11GA pickets. The thickest we use are 14GA pickets.". Is it acceptable to use 14 Ga Pickets rather than the 11 ga pickets specified
Answer: Contractor shall reference revised specification Section 32 31 19 (Decorative Metal Fencing) contained within this addendum.
4. Question: Merchants Metals does not carry 11 gauge panels. Please advise.
Answer: Contractor shall reference revised specification Section 32 31 19 (Decorative Metal Fencing) contained within this addendum.

END OF DOCUMENT

DOCUMENT 00 41 13

BID FORM AND PROPOSAL

To: Governing Board of the East Side Union High School District ("District" or "Owner")

From: _____
(Proper Name of Bidder)

The undersigned declares that Bidder has read and understands the Contract Documents, including, without limitation, the Notice to Bidders and the Instructions to Bidders, and agrees and proposes to furnish all necessary labor, materials, and equipment to perform and furnish all work in accordance with the terms and conditions of the Contract Documents, including, without limitation, the Drawings and Specifications of Bid No. B-01-25-26/CP7028, for the following project known as:

**Fencing Improvements @ Calero, Independence, Santa Teresa,
Silver Creek High Schools**

("Project" or "Contract") and will accept in full payment for that Work the following total lump sum amount, all taxes included:

_____ dollars	\$ _____
BASE BID	
<i>Bidder acknowledges and agrees that the Base Bid accounts for the Total Cost of the Work.</i>	

Additive Alternates:

Alternate #1: Fortress Building Products (Independence High School)

_____ dollars	\$ _____
Additive/Deductive	

Alternate #2: Wood Panel Fencing (Calero High School)

_____ dollars	\$ _____
Additive/Deductive	

Descriptions of alternates are primarily scope definitions and do not necessarily detail the full range of materials and processes needed to complete the construction.

[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK]

Additional Detail Regarding Calculation of Base Bid

1. **[RESERVED]**
2. **[RESERVED]**
3. **[RESERVED]**
4. **[RESERVED]**
5. The undersigned has reviewed the Work outlined in the Contract Documents and fully understands the scope of Work required in this Proposal, understands the construction and project management function(s) is described in the Contract Documents, and that each Bidder who is awarded a contract shall be in fact a prime contractor, not a subcontractor, to the District, and agrees that its Proposal, if accepted by the District, will be the basis for the Bidder to enter into a contract with the District in accordance with the intent of the Contract Documents.
6. The undersigned has notified the District in writing of any discrepancies or omissions or of any doubt, questions, or ambiguities about the meaning of any of the Contract Documents and has contacted the Construction Manager before bid date to verify the issuance of any clarifying Addenda.
7. The undersigned agrees to commence work under this Contract on the date established in the Contract Documents and to complete all work within the time specified in the Contract Documents.
8. The liquidated damages clause of the General Conditions and Agreement is hereby acknowledged.
9. It is understood that the District reserves the right to reject this bid and that the bid shall remain open to acceptance and is irrevocable for a period of ninety (90) days.
10. The following documents are attached hereto:
 - Bid Bond on the District's form or other security
 - Designated Subcontractors List
 - Site Visit Certification
 - Non-Collusion Declaration
 - Iran Contracting Act Certification
 - Off-Road Diesel-Fueled Fleet Certification

11. Receipt and acceptance of the following Addenda is hereby acknowledged:

No. _____, Dated _____	No. _____, Dated _____
No. _____, Dated _____	No. _____, Dated _____
No. _____, Dated _____	No. _____, Dated _____

12. Bidder acknowledges that the license required for performance of the Work is an A, B, and/or C-13 license.
13. Bidder hereby certifies that Bidder is able to furnish labor that can work in harmony with all other elements of labor employed or to be employed on the Work.
14. Bidder specifically acknowledges and understands that if it is awarded the Contract, that it shall perform the Work of the Project while complying with all requirements of the Department of Industrial Relations.
15. Bidder hereby certifies that its bid includes sufficient funds to permit Bidder to comply with all local, state or federal labor laws or regulations during the Project, including payment of prevailing wage, and that Bidder will comply with the provisions of Labor Code section 2810(d) if awarded the Contract.
16. Bidder agrees to comply with all requirements of the Project Labor Agreement.
17. **[RESERVED]**
18. Bidder represents that it is competent, knowledgeable, and has special skills with respect to the nature, extent, and inherent conditions of the Work to be performed. Bidder further acknowledges that there are certain peculiar and inherent conditions existent in the construction of the Work that may create, during the Work, unusual or peculiar unsafe conditions hazardous to persons and property.
19. Bidder expressly acknowledges that it is aware of such peculiar risks and that it has the skill and experience to foresee and to adopt protective measures to adequately and safely perform the Work with respect to such hazards.
20. Bidder expressly acknowledges that it is aware that if a false claim is knowingly submitted (as the terms "claim" and "knowingly" are defined in the California False Claims Act, Gov. Code, § 12650 et seq.), the District will be entitled to civil remedies set forth in the California False Claim Act. It may also be considered fraud and the Contractor may be subject to criminal prosecution.
21. The undersigned Bidder certifies that it is, at the time of bidding, and shall be throughout the period of the Contract, licensed by the State of California to do the type of work required under the terms of the Contract Documents and registered as

a public works contractor with the Department of Industrial Relations. Bidder further certifies that it is regularly engaged in the general class and type of work called for in the Contract Documents.

[SIGNATURE ON FOLLOWING PAGE]

Bidder hereby certifies to the District that all representations, certifications, and statements made by Bidder, as set forth in this bid form, are true and correct and are made under penalty of perjury.

Dated this _____ day of _____ 20 ____

Name of Bidder: _____

Type of Organization: _____

Signature: _____

Print Name: _____

Title: _____

Address of Bidder: _____

Taxpayer Identification No. of Bidder: _____

Telephone Number: _____

Fax Number: _____

E-mail: _____ Web Page: _____

Contractor's License No(s): No.: _____ Class: _____ Expiration Date: _____

No.: _____ Class: _____ Expiration Date: _____

No.: _____ Class: _____ Expiration Date: _____

Public Works Contractor Registration No.: _____

END OF DOCUMENT

DOCUMENT 01 22 00

ALTERNATES AND UNIT PRICING**PART 1 – ALTERNATES****1.01 RELATED DOCUMENTS AND PROVISIONS**

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions;
- C. Bid Form and Proposal;
- D. Instruction to Bidders.

1.02 DESCRIPTION

The items of work indicated below propose modifications to, substitutions for, additions to and/or deletions from the various parts of the Work specified in other Sections of the Specifications. The acceptance or rejection of any of the alternates is strictly at the option of the District subject to District's acceptance of Contractor's stated prices contained in this Proposal.

1.03 GENERAL

Where an item is omitted, or scope of Work is decreased, all Work pertaining to the item whether specifically stated or not, shall be omitted and where an item is added or modified or where scope of Work is increased, all Work pertaining to that required to render same ready for use on the Project in accordance with intention of Drawings and Specifications shall be included in an agreed upon price amount.

1.04 BASE BID

The Base Bid includes all work required to construct the Project completely and in accordance with the Contract Documents.

1.05 ALTERNATES

- A. **Add Alternate Fence System: Fortress Building Products, ARES, Scorpio, Garland, Texas (866) 323-4766.**
- B. **Wooden Fencing System at Calero High School. Price to provide and install the wood panel fencing system at Calero High School.**

The above Alternate descriptions are general in nature and for reference purposes only. The Contract Documents, including, without limitation, the Drawings and Specifications, must be referred to for the complete scope of Work.

PART 2 - UNIT PRICING

2.01 GENERAL

Contractor shall completely state all required figures based on Unit Prices listed below. Where scope of Work is decreased, all Work pertaining to the item, whether specifically stated or not, shall be omitted and where scope of Work is increased, all work pertaining to that item required to render same ready for use on the Project in accordance with intention of Drawings and Specifications shall be included in an agreed upon price amount.

2.02 UNIT PRICES


Furnish unit prices for each of the named items on a square foot, lineal foot, or per each basis, as applies. Unit prices shall include all labor, materials, services, profit, overhead, insurance, bonds, taxes, and all other incidental costs of Contractor, subcontractors, and supplier(s).

- A. NA
- B. NA

END OF DOCUMENT



980 W. ELLIOT ROAD
SUITE 210
TEMPE, AZ 85284
PH 602.635.4226

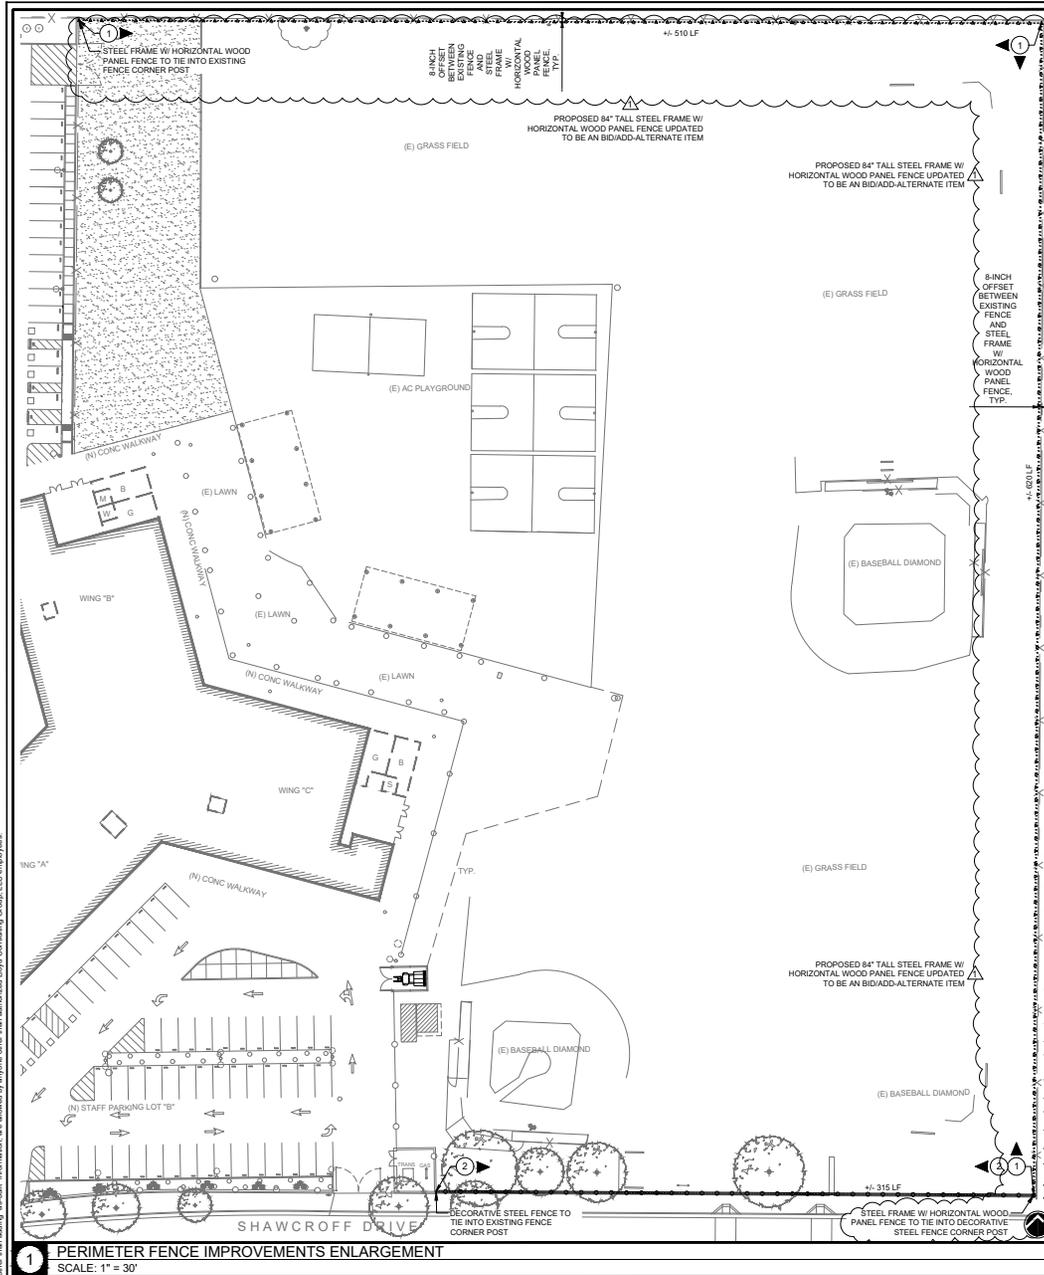

KEYNOTES

- ① ADD-ALTERNATE #2 84" TALL STEEL FRAME W/ HORIZONTAL WOOD PANEL FENCE SET 8" AWAY FROM EXISTING NEIGHBORING FENCE PER DETAIL 12, SHEET CS-1.
- ② 84" TALL DECORATIVE STEEL FENCE W/ 12" X 6" CONCRETE EDGE BAND TO TIE INTO EXISTING FENCE PER DETAIL 3, SHEET CS.1 AND 4, SHEET CS.6.

LEGEND

- PROPERTY LINE
- ▨ EXISTING BUILDING
- - - - - EXISTING FENCE TO REMAIN
- PROPOSED DECORATIVE STEEL FENCE W/ CURB
- PROPOSED STEEL FRAME W/ HORIZONTAL WOOD PANEL FENCE
- ① KEYNOTE SYMBOL WITH DIRECTION INDICATOR

NOTES

1. AERIAL SURVEY HAS BEEN PROVIDED BY THE DISTRICT FOR DESIGN. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND ADJUST AT NO ADDITIONAL COST TO OWNER.
2. PROPOSED FENCE LINEAR FOOTAGE LABELS ARE APPROXIMATE (+/-). CONTRACTOR SHALL FIELD VERIFY AND MEASURE PRIOR TO SUBMITTING BID.
3. FENCE POSTS ARE GRAPHICALLY REPRESENTATIONAL. CONTRACTOR SHALL FIELD VERIFY FENCE POST SPACING AND LOCATIONS IN FIELD PRIOR TO CONSTRUCTION.
4. SPACE FENCE POSTS EQUALLY ON RUNS BETWEEN END POSTS WHERE APPLICABLE. CONFIRM LAYOUT WITH THE DISTRICT PRIOR TO INSTALLATION.
5. CONTRACTOR SHALL NOT OVER CUT EXISTING ASPHALT OR CONCRETE PAVEMENT WHEN SAW CUTTING.
6. WHERE FENCE POSTS ARE ADJACENT TO ASPHALT OR CONCRETE PAVEMENT, POSTS SHALL BE OFFSET 6" O.C. FROM EXISTING OR NEWLY INSTALLED WOOD HEADER BOARD. REFER TO DETAIL 3, SHEET CS.1.
7. EACH FENCE POSTS SHALL HAVE A CONTROL JOINT O.C. WITH POST WHERE INSTALLED IN CONCRETE CURB.
8. CONTRACTOR SHALL FIELD VERIFY EXISTING IRRIGATION VALVES, LATERALS AND SPRINKLER HEADS PRIOR TO CONSTRUCTION. CONTRACTOR SHALL ADJUST EXISTING IRRIGATION AS NECESSARY FOR DECORATIVE STEEL FENCE INSTALLATION LAYOUT.
9. CONTRACTOR TO OBTAIN DIRECTION FROM THE DISTRICT IF ANY EXISTING TREES, UTILITIES OR STRUCTURES ARE IN CONFLICT WITH PROPOSED FENCE LINE LOCATIONS THAT ARE NOT SHOWN IN AERIAL SURVEY.
10. SHRUBS/ VINES/ VEGETATION AND TRIMMING OF TREE BRANCHES WITH A DIAMETER OF LESS THAN 2 INCHES SHALL BE REMOVED BY CONTRACTOR IF IT POSSES AN IMPEDIMENT TO FENCE INSTALLATION.



**100%
CONSTRUCTION
DOCUMENTS**

REV.	DESCRIPTION
2026-02-23	ADD-ALTERNATE #2

**ESUHS D FENCING
IMPROVEMENTS**

CALERO HIGH SCHOOL
420 CALERO AVENUE
SAN JOSE, CA 95123


PM:	EL
DRAWN:	LD
DATE:	01/28/2026
PROJECT NO.:	25-183



**ENLARGEMENTS -
CALERO**


DWG. NO.
C4.1

This plan document is the sole property of Lloyd Consulting Group, LLC. No alterations to these plans, drawings, or information, are allowed by anyone other than an authorized Lloyd Consulting Group, LLC employee.

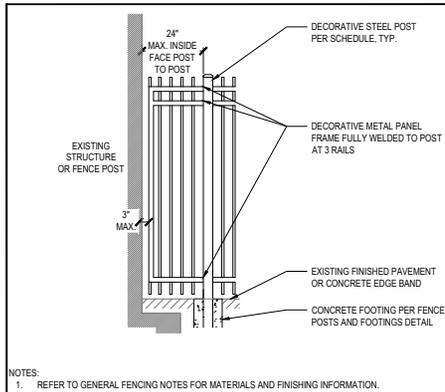


NOTES:
1. REFER TO GENERAL FENCING NOTES FOR MATERIALS AND FINISHING INFORMATION.

1 FENCE PANEL WING AT STRUCTURE EDGE
NTS

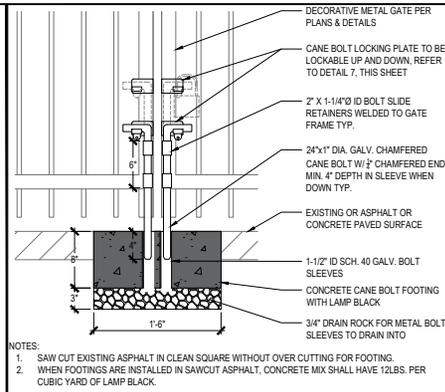


NOTES:
1. SAW CUT EXISTING ASPHALT IN CLEAN SQUARE WITHOUT OVER CUTTING FOR FOOTING.
2. WHEN FOOTINGS ARE INSTALLED IN SAWCUT ASPHALT, CONCRETE MIX SHALL HAVE 12LBS. PER CUBIC YARD OF LAMP BLACK.

2 HEAVY DUTY CANE BOLT AT DOUBLE SWING GATE
NTS

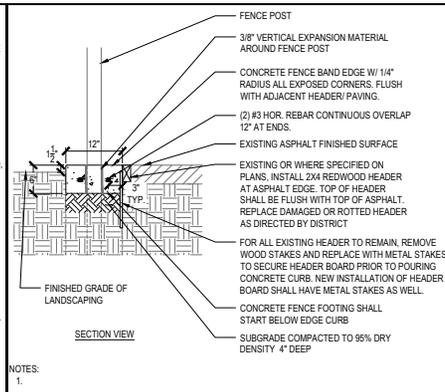


NOTES:
1.

3 CONCRETE EDGE CURB AT ASPHALT PATH
NTS

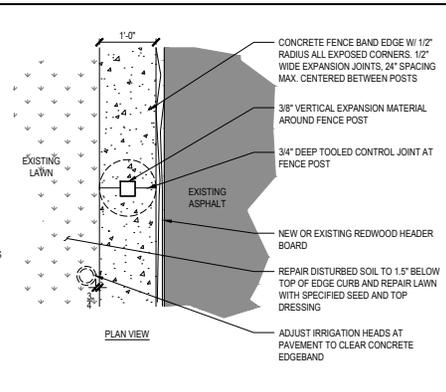


NOTES:
1.


4 CONCRETE EDGE CURB AT ASPHALT PATH
NTS

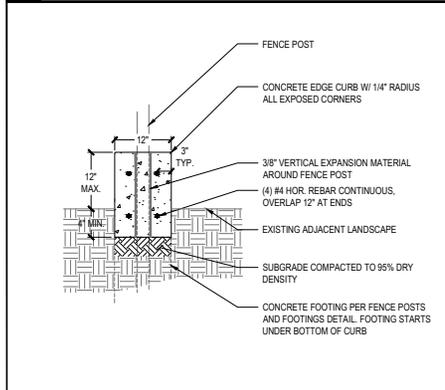


5 12" x 18" FENCE STEP CURB AT SLOPE
NTS

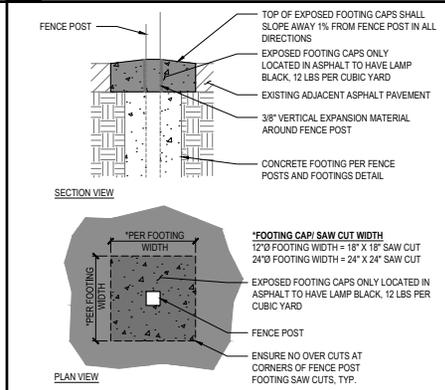


6 EXPOSED FENCE FOOTING IN ASPHALT
NTS

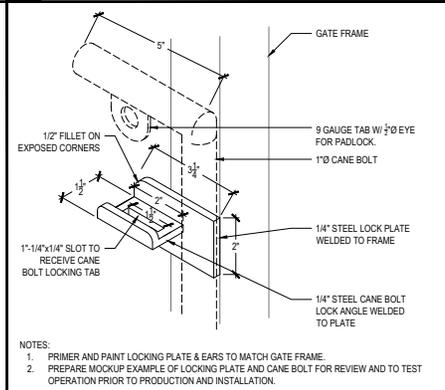


7 CANE BOLT LOCKING PLATE
NTS

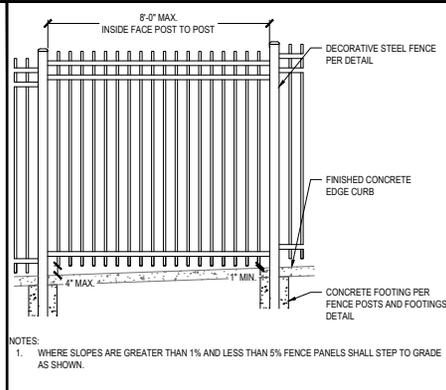


8 FENCE ON 1% - 5% SLOPE
NTS

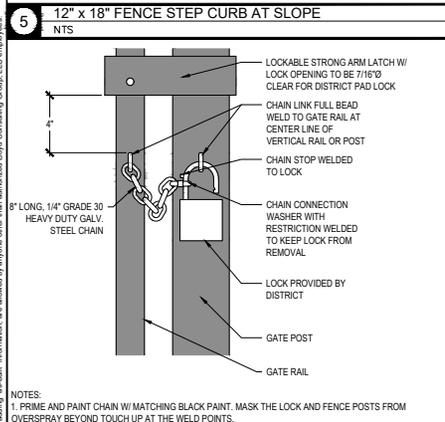


9 GATE CHAIN LOCK
NTS

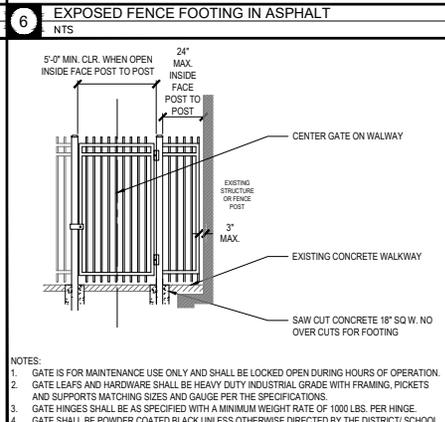

10 5' WIDE SINGLE GATE AT STRUCTURE EDGE
NTS

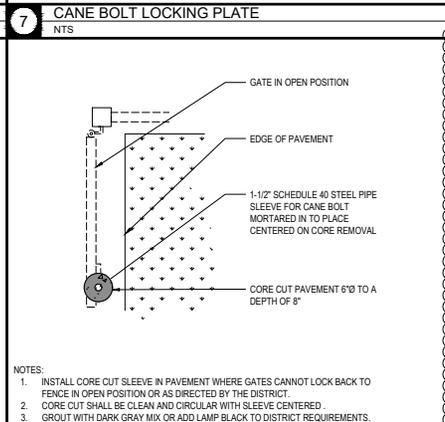

11 CANE BOLT SLEEVE FOR OPEN POSITION
NTS

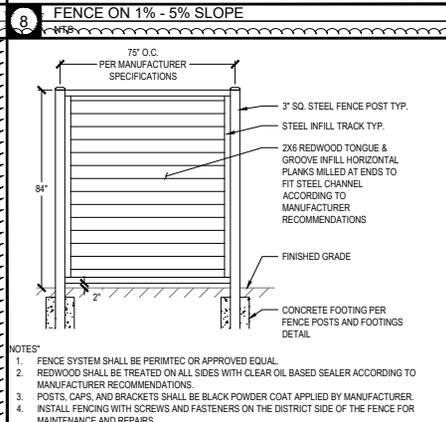

12 84" TALL STEEL FRAME & WOOD PANEL FENCE
NTS (ADD-ALTERNATE)

This document is the sole property of Lloyd Consulting Group, LLC. No alterations to these plans, drawings, or specifications are allowed for any use other than that authorized by Lloyd Consulting Group, LLC employees.



100%
CONSTRUCTION
DOCUMENTS

REV.
2026-02-23 | ADD-ALTERNATE #2

ESUHS D FENCING
IMPROVEMENTS

PM:	EL
DRAWN:	LD
DATE:	01/28/2026
PROJECT NO:	25-183

SCALE: AS NOTED

DETAILS

DWG. NO.
C5.1

**EAST SIDE UNION HIGH SCHOOL DISTRICT
INDEPENDENCE, SILVER CREEK & SANTA TERESA FENCING IMPROVEMENTS**

SECTION 32 31 19 DECORATIVE METAL FENCING

PART 1 – GENERAL

1.1 WORK INCLUDED

- A. The contractor shall provide all labor, materials, and appurtenance necessary for installation of the industrial decorative steel systems, steel frame with wood panel fence system, gates and gate operation defined herein and as shown on the construction drawings.
- B. Contractor shall supply a total industrial decorative steel fence system of tubular steel fencing with three rails. The system shall include all components (i.e., pickets, rails, posts, gates and hardware) as specified or approved equal.
- C. Contractor shall supply a total steel frame with horizontal wood panel fence system. The system shall include all components (i.e., posts, racks, wood members and hardware) as specified or approved equal.

1.2 RELATED SECTIONS

- A. 01 33 23 Shop Drawings, Product Data and Sample Submittals
- B. 02 41 13 Demolition
- C. 32 12 00 Asphalt Paving
- D. 32 16 00 Concrete
- E. 32 31 13 Chain Link Fences & Gates

1.3 PROJECT CONDITIONS

- A. Contractor shall review and accept all existing and improved site conditions, including existing fence connection conditions and grade prior to installation.
- B. Contractor shall not remove any portion of existing fencing unless they can immediately secure the area with a driven post temporary or permanent replacement.
- C. The project and school must be fully secured to a condition equal to the existing or better.
- D. Contractor is responsible for providing all temporary fencing and security barriers.
- E. Contractor assumes liability for any damages or breaches of security resulting from an unsecured site.
- F. Contractor must maintain continuous perimeter security.
- G. Existing fence removal must be synchronized with new installation to keep the school enclosed at all times (including overnight). Any gaps must be secured with temporary panels.
- H. Contractor shall verify existing site conditions before starting work.
- I. All products and materials shall be approved for use in the state of California.
- J. Contractor shall not interfere with use of adjacent buildings or block access to facilities to remain open during grading operations.

- K. Contractor shall maintain free and safe passage for staff and students to and from school buildings and campus facilities outside the project limits.
- L. Materials shall be installed according to the manufacturer recommendations. Contact Engineer where recommendations conflict with plans or specifications.
- M. If plans and details conflict with manufacturer recommendations the Contractor shall notify the District prior to installation

1.4 QUALITY ASSURANCE

- A. The Contractor must have a minimum of five (5) years of experience in the installation of decorative metal fence.
- B. The Contractor shall provide laborers and supervisors who are thoroughly familiar with the type of construction involved and materials and techniques specified.
- C. An alternate installation supervisor and crew is to be provided if for any reason the District's Representation is dissatisfied with the installation process.
- D. All product and material substitutions must be submitted in a formal substitution request and must be approved in writing by the District. Contractor shall remove all unapproved materials at the Contractor's expense.

1.5 REFERENCES

- A. ASTM - A36 Specification for Carbon Structural Steel
- B. ASTM - A123 Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on
- C. ASTM - A153 Standard Specification for Zinc Coating (Hot-dip) on Iron and Steel Hardware
- D. ASTM - A525 Specification for General Requirements for Steel Sheet, Zinc-Coated (Galvanized) by Hot-Dip Process
- E. ASTM D3359 - Test Method for Measuring Adhesion by Tape Test.
- F. ASTM F2408 – Ornamental Fences Employing Galvanized Steel Tubular Pickets.
- G. CBC 11B-404.2.8.2 – Gate Hinges

1.6 SUBMITTAL

- A. The manufacturer's submittal package must be submitted by Contractor and approved by the District prior to installation.
 - 1. Submit shop drawings showing plan layout, spacing of components, accessories, fittings, and hardware.
 - 2. Submit product data and fence details with complete dimensions, hardware and welds.

1.7 PRODUCT HANDLING AND STORAGE

- A. Upon receipt at the job site, all materials shall be checked to ensure that no damage occurred during shipping or handling. Materials shall be stored in such a manner to ensure proper ventilation and drainage, and to protect against damage, weather, vandalism, and theft.

1.8 PRODUCT WARRANTY

- A. All structural fence components (i.e. rails, pickets, and posts) shall be warranted within specified limitations, by the manufacturer for a period of 10 years from date of original purchase. Warranty shall cover any defects in material finish, including cracking, peeling, chipping, blistering or corroding.
- B. Reimbursement for labor necessary to restore or replace components that have been found to be defective under the terms of manufacturer's warranty shall be guaranteed for five (5) years from date of original purchase.

PART 2 – PRODUCTS

2.1 DECORATIVE STEEL FENCE MANUFACTURER

- A. Decorative metal fence system shall be tubular steel, fully welded industrial grade by Merchant Metals or Capitol Steel Products, Sacramento, CA or approved equal. (916) 383-3368
 - 1. Panels style shall be Secure Weld Plus, 3-Rail, Kent.
 - 2. Color shall be black powder coat.
- B. Additional Alternate Fence System: Fortress Building Products, ARES, Scorpio, Garland, Texas (866) 323-4766.
 - 1. Grade A cold rolled 50,000 psi steel w/ G-90 zinc coating inside and outside surface conforming to ASTM A123
 - 2. Rails shall be C-channel 12 gauge.
 - 3. Post shall be 12-gauge welded and formed steel tubing.
 - 4. I-beam shall be 12-gauge solid steel with powder coat factory finish.

C. DECORATIVE STEEL FENCE MATERIAL

- 1. Line & terminal posts shall be 4"x4", 11-ga. square steel tubular members.
- 2. Material for fence panel framework & rails shall be 2", 14-ga. square steel tubular members.
- 3. Material for pickets shall be steel 1", 14-ga. square steel tubular members.
- 4. Pedestrian gate posts shall be 11-ga. square steel tubular members with size per plans.
- 5. Gate posts with gate swings over 6-feet shall be ¼" HSS steel tubes with size per plans.

D. DECORATIVE STEEL FENCE FINISHES

- 1. Posts, rails, frames, pickets and parts of fence including hardware shall be powder coated after galvanizing in accordance with manufacturer's instructions.
- 2. Color shall be black, per District selection.

E. DECORATIVE STEEL FENCE FABRICATION

- 1. Fence panels shall be fully welded, and factory finished.

F. DECORATIVE STEEL FENCE OPERATION HARDWARE

1. Gate Latch Assembly shall be 2" heavy duty, industrial, lockable, strong-arm latch for square frame.
2. Hinges shall be heavy duty, weld-on, industrial grade, Shut-It® Heavy-Duty BadAss™, swing hinges from D&D Technologies. (800) 716-0888
 - a. Contractor shall provide the hinge capacity to meet the weight and length rating per the manufacturer recommendations.
 - b. Provide 180-degree swing hinges where indicated in plans and details.
 - c. Hinges shall be weld-on.
3. Cane bolts shall be 1-inch minimum diameter solid steel with brackets to allow locking in place in up or down position.
 - a. Bolts shall be galvanized with mitered bottom end.
4. Hardware shall be powder coated, black per to match posts, rails and panels.

2.2 STEEL FENCE FRAME & HORIZONTAL WOOD PANELS

- A. Steel frame and wood panels shall be steel frame with tracks and wood panels by Perimtec®, 1698 Shawnee Rd. #10, Call (888) 995-8077 or approved equal.
1. Fence shall be 84" tall w/ 3-inch square 11-gauge steel posts.
 2. Horizontal wood panels shall be 2x6 redwood, tongue and groove, milled to fit the post and rail tracks according to manufacturer specifications.
 3. Metal framing and posts shall be 11-gauge steel powder coated black by manufacturer.
 4. Wood panels shall be treated on all sides with clear oil-based sealer applied according to manufacturer recommendations. Sealer to be approved by District prior to application.

2.3 CONCRETE FOOTINGS

1. All concrete for fence post footings shall be 3000psi minimum compressive strength and monolithically poured.
2. Lamp black shall be added per concrete specifications where posts sit in asphalt
3. Where top of footing concrete is exposed to the finished surface it shall slope 1% away from the post and be finished clean with smooth trowel.

PART 3 – EXECUTION

3.1 PREPARATION

- A. All new installation shall be laid out by the contractor in accordance with the construction plans.

3.2 FENCE INSTALLATION

- A. Fence post shall have 8-foot maximum spacing according to plans and manufacturer recommendations.

- B. For installations that must be raked to follow sloping grades, the post spacing dimension must be measured along the grade.
- C. Fence panels shall be welded to posts and installed according to the manufacturer recommendations.

3.3 GATE INSTALLATION

- A. Gate posts spacing shall be verified through shop drawings and are dependent on standard out-to-out gate leaf dimensions and gate hardware selected.
- B. Type and quantity of gate hinges shall be based on the application, weight, height, and number of gate cycles according to manufacturer recommendations.
- C. Gate operating hardware be installed according to manufacturer recommendations.

3.4 CLEANING

- A. The contractor shall clean the jobsite of excess materials; post-hole excavations shall be scattered uniformly away from posts.

END OF SECTION